

The Solution –

Dataduct Concert Model transformation

The Cramer export was persisted in an SQL database within Concert. Each daily set of SDH files was reconciled against the corresponding table in the database and updated as necessary. The volume of data being processed was considerable, 600Mb of XML containing over half a million circuits. Processing, reconciliation of this data with the locally stored version in the Concert database and export to TSM was completed within 10 minutes on a low end Sun server.

The circuit types that were processed for export to TSM were,

- ATM Bearer, PVC, VC, VP
- PDH Bearer
- PDH Circuit (usually E1s)
- PDH IMA Parallel Circuit
- PSH/SDH Cross Domain
- SDH HO Path
- SDH HO Trail (VC4)
- SDH LO Trail (VC12)
- SDH Multiplexer Section

A daily dataload was performed towards TSM using the TSM dataload utility. The volume of data being dataloaded was large, so the solution was configured to export a delta of the changes since the most recent export. An entire snapshot could be generated when synchronisation was required. A typical snapshot contained up to half a million circuit and relationships. The circuit and relationship data was used by TSM to populate its own model of the network.


The relationships and alarm monitors were used to perform event correlation and root cause analysis. The dataload generation to TSM was enhanced with domain specific knowledge to improve the quality of data being delivered to TSM, specifically in the areas of,

- verifying conformance of logical and physical network infrastructure naming with policies
- identifying inconsistencies between exported entities from Cramer. eg. non existent protecting circuits, incorrectly configured ports
- mapping of physical equipment location to logical management domain

The SDH inventory data hub and gateways operate autonomously and independently of each other. This results in a loosely coupled service oriented deployment.

Maintenance and updates can be applied to individual gateways without affecting any other integrations or taking down the system. System availability meets the five 9s availability required by Telecom Operators.

As with all carrier class solutions, the mediation function must be monitored and managed. If the mediation solution degrades or fails, relevant alarms must be raised. A central administration console is provided for the graphical monitoring and management of all data mediation solutions on the platform. Warnings and alarms are routed to system managers.

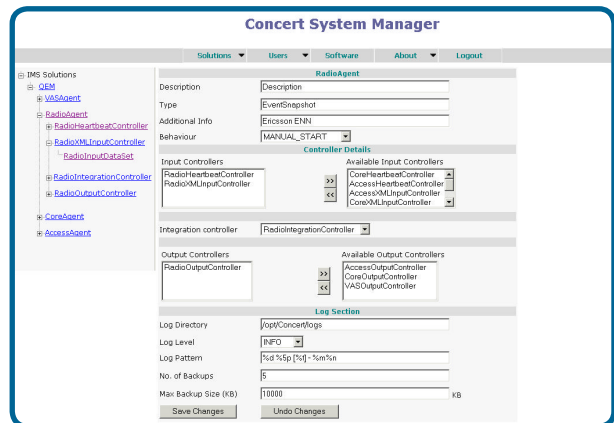

Further integrations can be added seamlessly without any modification to the underlying platform. In addition, the transmission data extracted is now available to all other NMS applications from the internal data hub at a fraction of the cost of doing a traditional point-to-point integration. This flexibility and economy of re-use is why the industry is moving away from custom point-to-point solutions and moving towards data hub and product based architectures.

The Benefits

Customer Service Management system is populated with real-time configuration data which enables,

- A managed and quality assured data synchronisation engine
- Reduced Fault Resolution Times
- Ability to meet SLA's
- Reduced operational customer & network support costs.



Dataduct
46 Patrick Street
Dun Laoghaire
Co. Dublin
Ireland

Tel: +353 1 2304406
Fax: +353 1 2846545

Email: info@dataduct.com
Web: www.dataduct.com